

# HDMI 60M KVM EXTENDER


## **Introduction:**

The Extender uses single cat5e or cat6(recommended)cables instead of HDMI cable to transmit high definition signal up to 60 meters,cutting down the cost. The Extender is designed to supply for long distance transmission of high definition signal.



## **Features:**

- 1: Support highest video resolution 1080p/60Hz;
- 2: 60M long distance transmission:

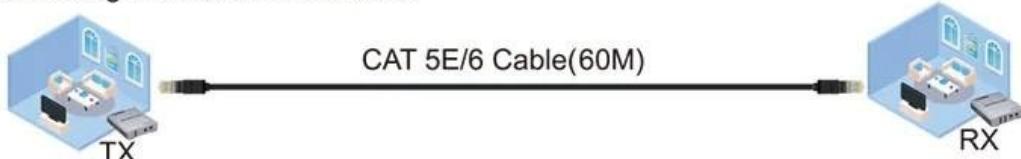


- 3: Both the TX and RX support 3.5MM left and right audio output;
- 4: Low power consumption, low temperature and high safety;
- 5: Support IR remote control;
- 6: Support USB mouse and keyboard extension.

## Specifications:

Length of CAT-5E/6 cable between RX and TX.....	Up to 60 meters
HDMI Input.....	1080p/1080i/720p/576p/576i/480p/480i
HDMI Output.....	1080p/1080i/720p/576p/576i/480p/480i
Max bandwidth.....	150MHz
Max baud rate .....	4.5Gbps
Input video signal .....	0.5~1.5Volts p-p
Output DDC signal.....	5Volts p-p (TTL)
Input HDMI cable distance.....	≤10m AWG26 HDMI standard cable
Output HDMI cable distance.....	≤15m AWG26 HDMI standard cable
TX max working current .....	300mA
RX max working current .....	300mA
Power adapter format.....	Input:AC (50HZ,60HZ)100V-240V; Output: DC5V/1A
Operating temperature range.....	(-15 to +45C)
Operating humidity range.....	5 to 90%RH (No Condensation)
Dimension (LxWx H) .....	94x84x24(mm)
TX weight .....	220g
RX weight .....	220g

## Connection diagram:

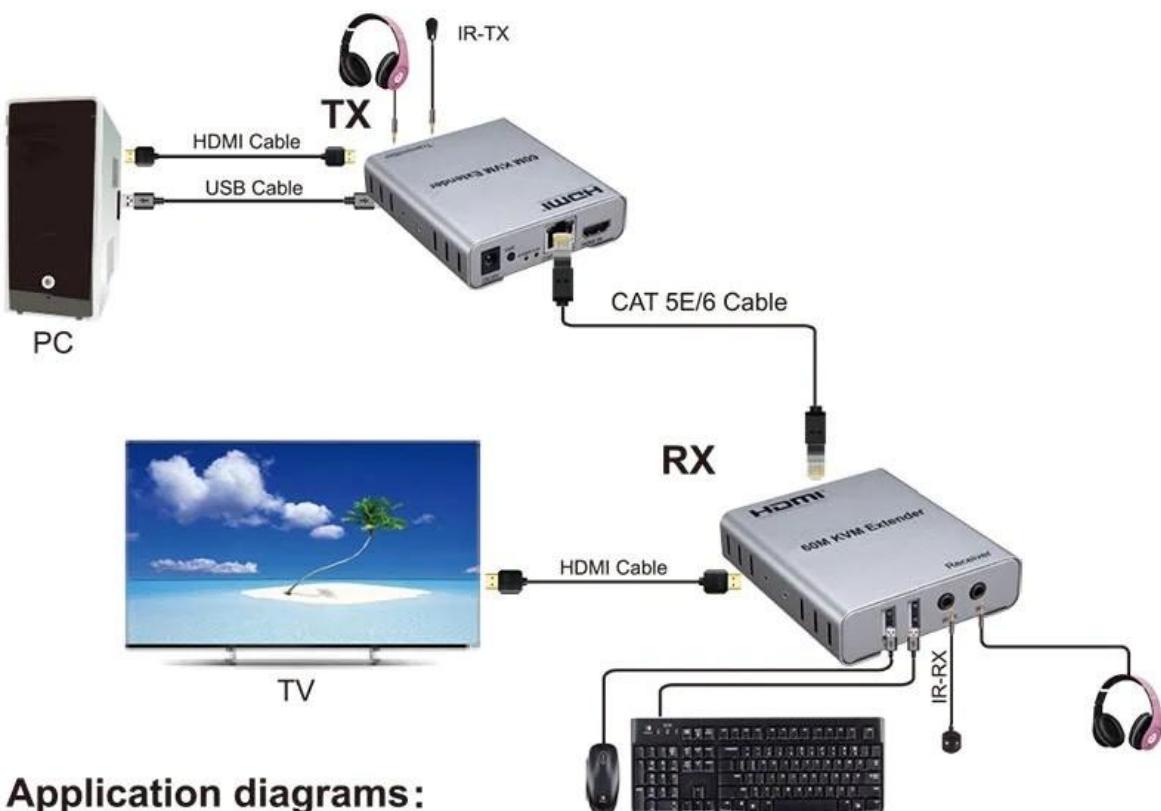

## Application diagrams:

HDMI extender is used in audio-visual conference, command and control center, ticketing platform, home theater,multi-media teaching,conference system and so on.



Audio-visual conference





Command and control center



Home theater



## Physical interface diagram:

**TX:**

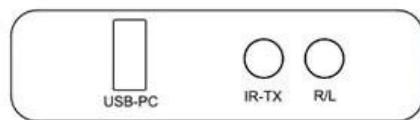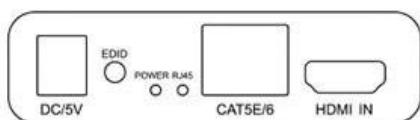

Port	Function description
Input	HDMI Input port
DC/5V	5V DC Power input port
CAT5E/6	Cat5e/6 cable output port
USB	USB-PC
Audio	Stereo output
IR-TX	3.5MM IR transmitter
EDID	1080P and 720P switch button (press for 3 seconds)

**RX:**



Port	Function description
Output	HDMI Output port
DC/5V	5V DC Power input port
CAT5E/6	Cat5e/6 cable input port
IR-RX	3.5MM IR receiver
USB 1	USB for mouse or keyboard
USB 2	
Audio	Stereo output

## The Package includes:

1.TX Extender	1PCS	4.IR transmitter cable	1PCS
2.RX Extender	1PCS	5. 5V power adapter	2PCS
3.IR receiver cable	1PCS	6. User Manual	1PCS

without retail box, if need, pls contact us first